

# HF150W-SC, 150W Single Output Power Supply with PPC



**CB**  
**CE**



## Features:

- Universal AC input / full range
- PF>0.98 @ 115VAC; >0.94 @ 230VAC
- Approvals: TÜV, CB, CE
- Protections: overload/ over voltage/ over temperature/ short circuit
- Japanese brand components for key parts
- Electrolytic capacitors all 105°C
- Dimensions: 212 x 99 x 50mm

## Specifications:

Input Voltage	85~264VAC (120~370VDC)
Input Current	2.5A
Input Frequency	47~63Hz
Inrush Current	cold start, 20A/115V, 40A/230V
Input Leakage Current	< 1mA/230VAC
Line Regulation (full load)	± 0.5%
Voltage Adjust Range	± 10%
Output Overload Protection	105~150%, current limiting, auto recovery
Output Over Voltage Protection	115~150%, shut off, re-power on to recover
Short Circuit Protection	current limiting, auto recovery
Rise Time	50ms @full load (typical)
Hold up Time	20ms @full load (typical)
Mechanical Feature	enclosed
Dimensions	212 x 99 x 50mm (L x W x H)

Operating Temperature	-20°C ~+70°C (ref. derating curve)
Storage Temperature	-20°C ~+85° C
Operating Humidity	20%~93%RH (non condensing)
Storage Humidity	20%~95%RH (non condensing)
MTBF	>100,000 hours
Cooling	convection
Safety Standards	GB4943, UL60950, EN60950
EMC Standards	GB9254, EN55022 Class B EN55024, EN61000-3-2,3 EN61000-4-2,3,4,5,6,8,11
Withstand Voltage	I/P -O/P: 3.0KVAC/1min I/P - PE: 1.5KVAC/1min O/P-PE: 0.5KVAC/1min
Vibration	10~150Hz, 2G 10min/1cycle, 30min each along X, Y, Z axes
Connection	7P/9.5mm screw terminal block
Packing	0.71kgs, 22pcs: 17.5kgs/ 0.045CBM per carton


Model No.	DC Output	Rated Power	Load Regulation	Voltage Tolerance	Ripple & Noise (max.)	Efficiency
HF150W-SC-5	5V 30.0A	150.0W	0.5%	± 2%	100mVp-p	79%
HF150W-SC-7.5	7.5V 20.0A	150.0W	0.5%	± 2%	100mVp-p	81%
HF150W-SC-12	12V 12.5A	150.0W	0.5%	± 1%	120mVp-p	84%
HF150W-SC-13.5	13.5V 11.2A	151.2W	0.5%	± 1%	120mVp-p	85%
HF150W-SC-15	15V 10.0A	150.0W	0.5%	± 1%	120mVp-p	85%
HF150W-SC-24	24V 6.3A	151.2W	0.5%	± 1%	150mVp-p	86%
HF150W-SC-36	36V 4.2A	151.2W	0.5%	± 1%	150mVp-p	86%
HF150W-SC-48	48V 3.2A	153.6W	0.5%	± 1%	150mVp-p	86%

## Notes:

1. All parameters are measured at 230VAC input, rated load and 25°C of ambient temperature.
2. Line regulation is measured from low line to high line at rated load.
3. Load regulation is measured from 0% to 100% of rated load for single output models. For multi-output models, it is measured from 20% to 100% of rated load, and other output at 60% rated load.
4. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1µF & 47µF parallel capacitor.
5. The power supply is regarded as a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.

# HF150W-SC, 150W Single Output Power Supply with PPC

## Mechanical Dimensions:

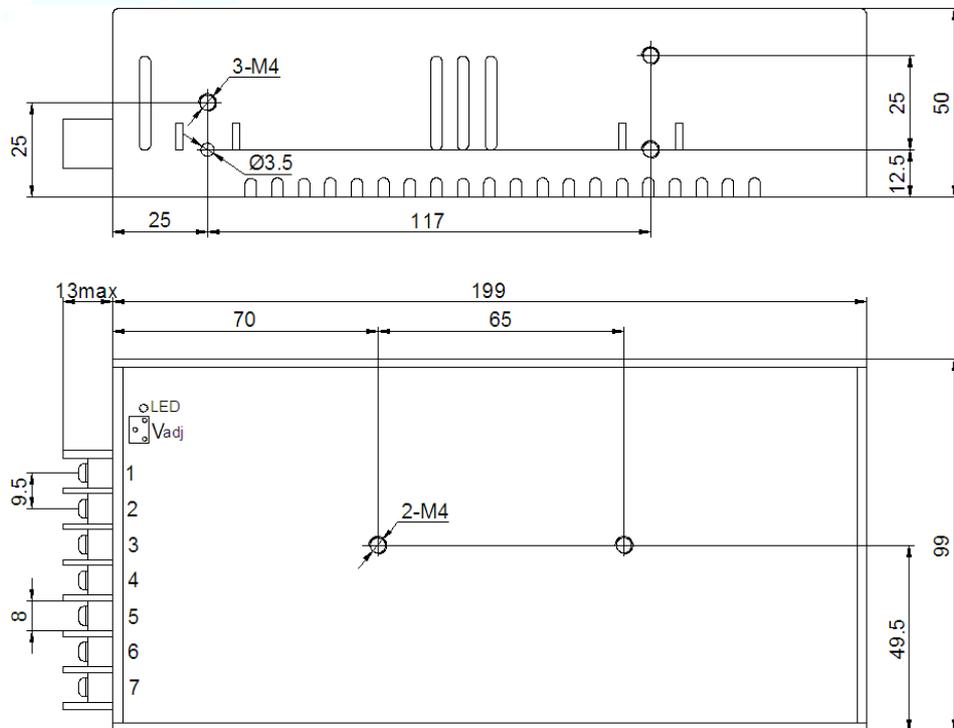

**Length of assembly screw: max. 6mm**

Terminal Pin assignment

Pin No.	Assignment	Pin No.	Assignment
1,2	DC OUTPUT +V	5	PE
3,4	DC OUTPUT -V	6	AC/N
		7	AC/L

## Derating properties:

