


UG21/15 SL

N – Plug solderless / Stecker lötfrei

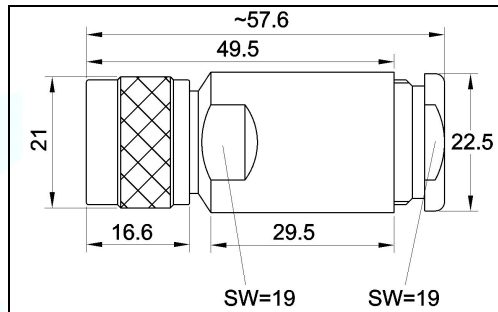

All dimensions in mm - Alle Dimensionen in mm

Norm:	IEC 61 169-16	Connector type:	N - plug, solderless	Steckertyp:	N - Stecker, lötfrei
-------	---------------	-----------------	----------------------	-------------	----------------------

Art. No.:	UG21/15 SL
Artikel Nr.:	

Cable Types:	ECOFLEX 15
Kabeltypen:	LMR 600
	Pin hole / Loch ø: 4,6 mm

Protection code:	IP 67
Schutzklasse:	

Mechanical Specifications / Mechanische Eigenschaften

Life time (plug cycles):	Lebensdauer (Steckungen):	≥ 500	≥ 500
Material (metal parts excl. pin):	Material (Metallteile außer Pin):	CuZn39Pb3	CuZn39Pb3
Material pin (diamagnetic):	Material Pin (diamagnetisch):	CuSn6; QSn6.5-01 (C51900)	CuSn6; QSn6.5-01 (C51900)
Material isolator:	Material Isolierhülse:	PTFE	PTFE
Material gasket	Material Anpressdichtung:	Rubber	Gummi
Material O-Ring:	Material O-Ring:	Rubber	Gummi
Material gasket in Mating Face:	Material Dichtung Steckergesicht:	Silicone	Silikon
Standard: Surface (metal parts excl. pin):	Standard: Oberfläche (Metallteile außer Pin):	Nickel plated	vernickelt
Optional: Surface (metal parts excl. pin):	Option: Oberfläche (Metallteile außer Pin):	CuSnZn3	CuSnZn3
Surface pin:	Oberfläche Pin:	gold plated	vergoldet
Operating temperature:	Temperaturbereich:	-45°C / +155 °C	
Weight:	Gewicht:	78 g	
RoHs compliant:	RoHs conform:	Yes/ Ja: ☒	No/ Nein: ☐

Electrical Specifications / Elektrische Eigenschaften

Working voltage:	Betriebsspannung:	≤ 1000 V RMS	
Impedance:	Impedanz:	50 Ω	
Insulation resistance:	Isolationswiderstand:	≥ 5 GΩ	
Frequency up to:	Frequenz bis zu:	11 GHz	
Inner contact resistance	Durchgangswiderstand innen	≤ 1,5 mΩ	
Outer contact resistance	Durchgangswiderstand aussen	≤ 1,0 mΩ	