


UG23

N – Female / Buchse

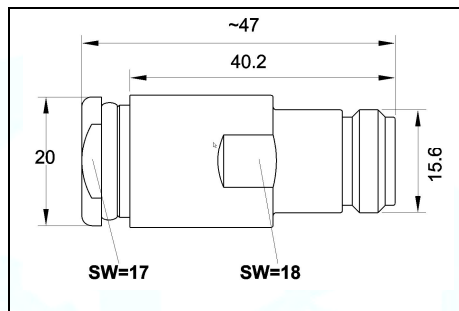

All dimensions in mm - Alle Dimensionen in mm

Norm:	IEC 61 169-16	Connector type:	N - female	Steckertyp:	N - Buchse
-------	---------------	-----------------	------------	-------------	------------

Art. No.:	UG23
Artikel Nr.:	

Protection code:	IP 67
Schutzklasse:	

Cable Types: Kabeltypen:	Aircom Premium	ECOFLEX 10	
	H1000	UltraFlex 10	
	H2000 Flex	HyperFlex 10	
	LMR400	H2010	
	RG213	Calorix 10	
	Pin 1: hole / Loch ø: 2,8 mm	Pin 2: hole / Loch ø: 3,0 mm	

Mechanical Specifications / Mechanische Eigenschaften

Life time (plug cycles):	Lebensdauer (Steckungen):	≥ 500	≥ 500
Material (metal parts excl. pin):	Material (Metallteile außer Pin):	CuZn39Pb3	CuZn39Pb3
Material pin:	Material Pin:	CuSn6; QSn6.5-01 (C51900)	CuSn6; QSn6.5-01 (C51900)
Material isolator:	Material Isolierhülse:	PTFE	PTFE
Material gasket	Material Anpressdichtung:	Rubber	Gummi
Material O-Ring:	Material O-Ring:	Rubber	Gummi
Material gasket in Mating Face:	Material Dichtung Steckergesicht:	n. a.	–
Standard: Surface (metal parts excl. pin):	Standard: Oberfläche (Metallteile außer Pin):	Nickel plated	vernickelt
Optional: Surface (metal parts excl. pin):	Option: Oberfläche (Metallteile außer Pin):	CuSnZn3	CuSnZn3
Surface pin:	Oberfläche Pin:	gold plated	vergoldet
Operating temperature:	Temperaturbereich:	-55°C / +155 °C	
Weight:	Gewicht:	56 g	
RoHs compliant:	RoHs conform:	Yes/ Ja: ☒	No/ Nein: ☐

Electrical Specifications / Elektrische Eigenschaften

Working voltage:	Betriebsspannung:	≤ 1000 V RMS	
Impedance:	Impedanz:	50 Ω	
Insulation resistance:	Isolationswiderstand:	≥ 5 GΩ	
VSWR:	VSWR:	≥ 1,07 / (1 GHz)	
Inner Contact Resistance	Durchgangswiderstand innen	≤ 1,5 mΩ	
Outer Contact Resistance	Durchgangswiderstand aussen	≤ 1,0 mΩ	